BP-70M31

Future proofed by design with stringent security features and superior functionality for hybrid working




- 31ppm black & white MFP with seamless integration and connection to cloud based business process applications
- Built-in Microsoft® Teams connector strengthens collaboration by enabling direct and secure access for printing to or scanning from your Microsoft® Teams channels
- Keep your data, device and network secure with optional Bitdefender anti-malware protection software
- Securely print from or scan to public cloud storage services quickly and easily with single sign-on
- Scan at speeds of up to 280ipm with optional double feed detection for eliminating productivity interruptions
- Superior environmental performance delivers lower standby power consumption and low TEC value


- Feature rich hardware and solutions platform that supports the hybrid working environment
- Industry leading system and data protection features including BIOS based security and standard Trusted Platform Module ensure that confidential data is kept secure
- Interact with the MFP directly from your mobile device via WiFi, AirPrint, Bluetooth, NFC and QR Code
- 10.1-inch colour LCD operation panel offers a smartphone style user interface making everything easy to access and use
- Extensive finishing options including a folding unit bring even more flexibility to your print output
- Keep up-to-date and compliant with remote firmware and application updates via the Sharp Application Portal



Configurations

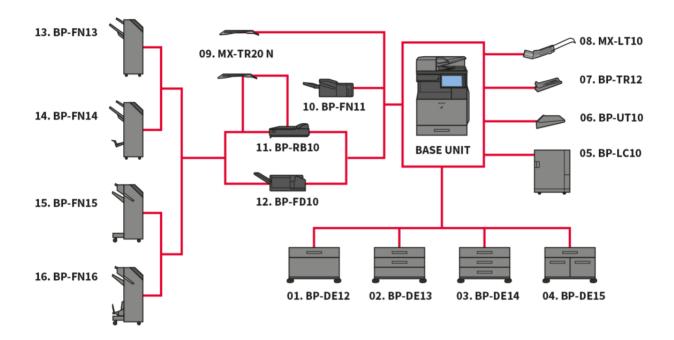

Configurations may differ per sales region. Please contact your local Sharp representative for further information.

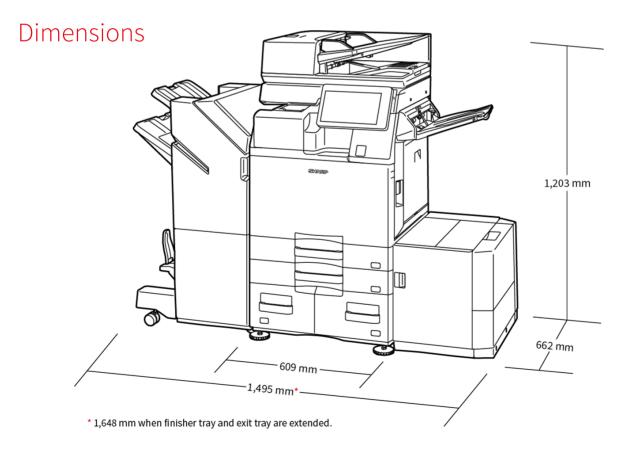

Dimensions are shown with optional equipment. Options may differ per region.

Options

Base Unit

01. BP-DE12 Stand with 550-sheet paper drawer

550 sheets*, SRA3 - A5R (60 - 300 g/m2)

02. BP-DE13 Stand with 2 x 550-sheet paper drawer

550 sheets* each for lower and upper trays, SRA3 - A5R (60 - 300 g/m2)

03. BP-DE14 Stand with 3 x 550-sheet paper drawer

550 sheets* each for lower and upper trays, SRA3 - A5R (60 - 300 g/m2)

04. BP-DE15 Stand with 550 + 2100-sheet paper drawer

Upper tray: SRA3 - A5R, 550 sheets* (60 - 300 g/m2)
Lower tray (Left): A4, 1,200 sheets* (60 - 105 g/m2)
Lower tray (Right): A4 - B5, 900 sheets* (60 - 105 g/m2)

05. BP-LC10 Large Capacity Tray

3,000 sheets*, A4 - B5 (60 - 220 g/m2)

06. BP-UT10 Utility Table

BP-DD10 Double Feed Detection Kit

Eliminates double feeding of paper while scanning

Printing

MX-PF10 Barcode Font Kit

Enables barcode printing

Faxing

BP-FX11 Fax Expansion Kit MX-FWX1 iFax Expansion Kit

Storage

BP-SD10 High Capacity SSD

512GB SSD

Sharp OSA®

MX-AMX1 Application Integration Module

Security

BP-FR12U Data Security Kit

Commercial version

BP-VD10 Virus Detection Kit

Finishing

07. BP-TR12 Exit Tray Unit

08. MX-LT10 Long Paper Feeding Tray

Recommended for banner printing

09. MX-TR20 N Job Separator Trav

Requires BP-TU10 Exit Tray Cabinet

10. BP-FN11 Inner Finisher

A3 - B5 (offset/staple), SRA3 - A5R (non offset)

Offset tray (upper): max. 500-sheet paper capacity*

Stapling capacity: max. 50-sheet multi-position staple*

Manual Stapling: 1-point at rear (Flat), 45 sheets (64 g/m2), 40 sheets (80 g/m2)

Stapleless capacity: max. 10-sheet (64 g/m2), 8 sheet (65 - 81.4 g/m2), 6 sheet (81.5 - 105 g/m2)

11. BP-RB10 Paper Pass Unit

Required when using BP-FN13, BP-FN14, BP-FN15 & BP-FN16

12. BP-FD10 Folding Unit

200 sheets*, A3, B4, A4R (Z-fold & half fold), A3, A4R (C-Fold, Accordion fold), 60 - 256 g/m2

13. BP-FN13 1k Finisher

A3W - A5R (offset/staple), SRA3 - A5R (non offset)

Offset tray (upper): max. 1,000-sheet paper capacity

Stapling capacity: max. 50-sheet multi-position staple*

14. BP-FN14 1k Saddle Stitch Finisher

A3W - A5R (offset/staple), SRA3 - A5R (non offset)

Offset tray (upper): max. 1,000-sheet paper capacity*

Stapling capacity: max. 50-sheet multi-position staple*

Saddle stitch tray (lower): 7 sets (11-15 sheets), 10 sets (6-10 sheets), 20 sets (1-5 sheets). 15 sheets max per set

15. BP-FN15 3k Finisher

A3 - B5 (offset/staple), SRA3 - A5R (non offset)

Offset tray (upper): max. 3,000-sheet paper capacity *

Stapling capacity: max. 65-sheet multi-position staple*

Manual Stapling: 1-point at rear (Flat), 45 sheets (64 g/m2), 40 sheets (80 g/m2)

Stapleless capacity: max. 10-sheet (64 g/m2), 8 sheet (65 - 81.4 g/m2), 6 sheet (81.5 - 105 g/m2)

16. BP-FN16 3k Saddle Stitch Finisher

A3 - B5 (offset/staple), SRA3 - A5R (non offset)

Offset tray (upper): max. 3,000-sheet paper capacity *

Stapling capacity: max. 65-sheet multi-position staple*

Manual Stapling: 1-point at rear (Flat), 45 sheets (64 g/m2), 40 sheets (80 g/m2)

Stapleless capacity: max. 10-sheet (64 g/m2), 8 sheet (65 - 81.4 g/m2), 6 sheet (81.5 - 105 g/m2)

Saddle stitch tray (lower): 10 sets (11-20 sheets), 15 sets (6-10 sheets), 25 sets (1-5 sheets). 20 sheets max per set

MX-PN14B/C/D Punch Modules (3, 2/4, 4 wide) for BP-FN11

MX-PN15B/C/D Punch Modules (3, 2/4, 4 wide) for BP-FN13/BP-FN14

MX-PN16B/C/D Punch Modules (3, 2/4, 4 wide) for BP-FN15/BP-FN16

^{*} Number of sheets based on 80 g/m2

Specifications

Engine speed B/W ppm (A4) 31 Engine speed B/W ppm (A3) 15 Paper size: Min.-Max. A6R - A3W Paper weight (g/m2) 55 - 300 Paper capacity:Std (sheets) 650 Paper capacity: Max. (sheets) 6300 Warm Up Time (sec.) 14 Memory general min/max (GB) STD / OPT SSD Capacity (GB) 256 / 512

Power requirements - rated local AC voltage

(Hz)

Duplex

Power consumption (kW) 1.84

609 x 662 x 860 Dimensions (mm)

Weight (kg) 72

DOCUMENT FEEDER

Original capacity (sheets) 300

DOCUMENT FILING

Document filing (Standard / Option) Document filing capacity- main and custom

folders (pages)

Document filing capacity- quick file folder

(pages)

Stored jobs Copy, print, scan, fax transmission Storage folders Quick file folder, main folder, custom folder (max. 1000)

STD

20000

10000

220 - 240V, 50 / 60Hz

FAX

Fax (Standard / Option)

MH / MR / MMR / JBIG Compression method **Communication protocol** Super G3 / G3

Transmission time (sec)

Modem Speed (bps) 33600 - 2400

STD 203.2 x 97.8 dpi / Ultra Fine Transmission resolution

406.4 x 391 dpi

Document Size (Min) Α5 Document Size (Max) A3 Memory (GB) **Grev Scale levels** 256 Dial Registration; rapid/speed dial 2000 **Broadcast Transmission (max. destinations)** 500

WIRELESS LAN

Wireless LAN (Standard / Option) STD **Compliant regulation**

IEEE802.11 a / b / g / n / ac Access mode Infrastructure mode, Software AP

mode

WEP, WPA / WPA2-mixed PSK, WPA Security

/ WPA2-mixed EAP, WPA2-PSK, WPA2-EAP, WPA2 / WPA3-mixed PSK / SAE, WPA3 SAE, WPA2 / WPA3-mixed EAP, WPA3 EAP

Original paper size (Max.) First copy out time B/W (sec.) 5.4 E-sort Std

Continuous copy (Max. copies) 9.999

Resolution Scan B/W (dpi) 600 x 600, 600 x 400, 600 x 300

Resolution Scan Colour (dpi) 600 x 600 Resolution Print (dpi) 1200 x 1200, 600 x 600, 9600 x 600

Gradation (equivalent levels) - B/W Gradation (equivalent levels) - Colour 256 Zoom range (%) 25 - 400

Preset copy ratios 10

Network Scanner (Standard / Option) STD Scan method Push scan and Pull scan

Resolution push scan (dpi) 100, 150, 200, 300, 400, 600

Resolution pull scan (dpi) 75, 100, 150, 200, 300, 400, 600, 50 -

А3

TIFF, PDF, PDF / A-1a, PDF / A-1b, File formats encrypted PDF, compact PDF,

JPEG, XPS, searchable PDF, Microsoft Office (pptx, xlsx, docx),

TXT (UTF-8), RTF

Scan destinations Desktop Scan destination FTP, Email Scan destination Network folder Scan destination USB memory

PRINTER

Resolution (dpi) 1200 x 1200, 600 x 600, 9600 x 600

Network Printer (Standard / Option) STD Ethernet

Interface Std/Opt USB 2.0, USB 3.0, 10Base-T / 100Base-TX / 1000Base-T, Optional

secondary LAN support Supported OS Standard Windows 8.1, 10, 11. Windows

Server 2012, 2012R2, 2016, 2019. Mac OS X 10.10, 10.11, 10.12, 10.13,

10.14, 10.15, 11, 12

Network protocols TCP / IP (IPv4, IPv6) **Printing protocols** LPR, Raw TCP (port 9100), POP3 (e-

mail printing), HTTP, FTP for downloading print files, IPP, SMB,

PDL Std/Opt STD PCL 6, Adobe® PostScript® 3™ **Available fonts**

80 (PCL), 139 (Adobe PostScript 3)

FINISHING

Output Capacity Max. 500 - 3000 Staple Capacity (sheets) Max. **Saddle Stitch** OPT Off-set shifting STD Hole punch

TONER YIELD

Black (pages at 6% coverage) 40000

Design and specifications are subject to change without prior notice. All information was correct at time of print. Microsoft, Excel, PowerPoint, OneDrive, SharePoint, Active Directory, Windows Server, and Windows are either registered trademarks or trademarks of Microsoft Corporation in the US and/or other countries. Adobe and PostScript 3 are either registered trademarks or trademarks of Adobe Systems Incorporated in the US and/or other countries. Google Drive, Gmail and Android are trademarks of Google LLC. The Google Drive trademark is used with permission from Google LLC. Box is a trademark, service mark, or registered trademark of Box, Inc. QR Code is a registered trademark of DENSO WAVE INCORPORATED in Japan and other countries. AirPrint and Mac are trademarks of Apple Inc., registered trademark of Denso Wave InCORPORATED in Japan and other countries. AirPrint and Mac are trademarks of Apple Inc., registered to the Us and other countries. P.C. is a registered trademark of Hewlett-Packard Company. Qualcomm DirectOffice is a product of Qualcomm Technologies, Inc. and/or its subsidiaries. Qualcomm is a trademark of Qualcomm Incorporated, registered in the US and other countries. DirectOffice is a trademark of User Incorporated, registered in the US and other countries. DirectOffice is a trademark of User Incorporated in the US and other countries. DirectOffice is a trademark or registered trademarks of their respective owners. ©Sharp Corporation July 2022. Ref. BP-70M31 Datasheet. All trademarks acknowledged. E&O.

